

Fig. Safe CWS1901, hinge left
E-Lock La Gard Combogard PRO, 4 shelves

[Safes]

[Type CWS]

A distinctive feature of the CWS series safes is their solid construction plus their size (CWS 1902 and CWS1904 double-doored) and they are available with optional fire protection – tested and certified in grade LFS60. Safes weighing less than 1.000 kg must be anchored.

[Product information]


Hinge	DIN right – model designation R (CWS1902, CWS1904 double-doored) option: DIN left
Door opening angle	180°
Body	double-walled, reinforced, filled with armoured, high resistant barrier material
Door structure	triple-walled, reinforced, filled with armoured, high resistant barrier material, internal boltwork protected by sheets of hardened steel to give extra anti-drill resistance
Locking mechanism	three-way moving boltwork with large steel bolts, protected by glass plate with additional emergency re-lockers, fix engaging steel bolts on the hinge side
Anchoring	fitted for floor anchoring anchoring bolts and shields are supplied for CWS0849, CWS0850 option: additional anchoring holes (customer specifies position)
Alarm connection	VdS-certified cable channels to allow connection to a burglar alarm system
Colour	inside and outside RAL 7037 dusty grey option: special colour according to RAL
Lock	model designation K – double-bit lock VdS class 2, S+G, 1 key guide tube, 2 bits model designation E – electronic lock VdS class 2, M-Locks EM3520 option: other lock models (primary lock or possible secondary locks)
Equipment	shelf adjustable (height setting 69 mm, CWS0849 60 mm) option: additional shelf, inside locker option (from CWS0850 up): drawer, pull-out shelf
Accessories	option: fire protection door rebate seals, alarm switch set, interior lighting
Option	additional certified fire protection LFS60 – except models: CWS0849, CWS1902, CWS1904 bolted version from Model CWS1000 up – assembly on site

Model	Outside dimensions		Inside dimensions		SH	Volume	Weight
	h x w x d (mm)		h x w x d (mm)				
CWS0849RK / CWS0849RE	848 x	645 x	695 x	495 x	1	110	625
CWS0850RK / CWS0850RE	848 x	810 x	695 x	660 x	1	220	865
CWS1000RK / CWS1000RE	1003 x	810 x	850 x	660 x	2	269	1010
CWS1200RK / CWS1200RE	1193 x	810 x	1040 x	660 x	2	329	1110
CWS1600RK / CWS1600RE	1538 x	810 x	1385 x	660 x	3	439	1365
CWS1901RK / CWS1901RE	1883 x	810 x	1730 x	660 x	4	548	1640
CWS1903RK / CWS1903RE	1883 x	1110 x	1730 x	960 x	4	797	2030
CWS1902K / CWS1902E	1883 x	1110 x	1730 x	960 x	4	797	2070
CWS1904K / CWS1904E	1883 x	1415 x	1730 x	1265 x	4	1050	2480

SH = Shelf

Please add 60 mm to the listed outside depth for mountings.

[Equipment options]

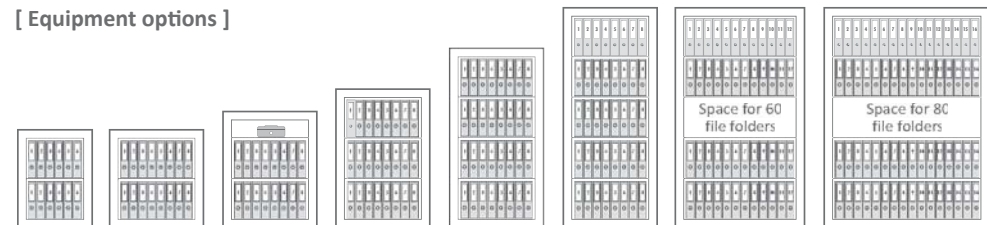

CWS0849 CWS0850 CWS1000 CWS1200 CWS1600 CWS1901 CWS1903/1902 CWS1904