

Page 1/3

Edition 2022, version 1.0

Thank you for your inquiry/order.

When purchasing a safe, it is important to clarify the transport route and the situation in which it is to be brought in.

For smooth transport processing, we ask you to fill out this transport questionnaire carefully.

We thank you for your understanding that only after receipt of the completed transport questionnaire can a decision be made as to whether a standard delivery is possible or whether an on-site inspection or special transport with a price on request is necessary due to stair transport and/or special circumstances.


Our team of consultants will be happy to answer any questions you may have.


Wertheim Vertriebs GmbH Danfoss-Straße 6 2353 Guntramsdorf Austria Tel +43 (0)2236 320 350 - 0 Fax+43 (0)2236 320 350 - 21 vertrieb@wertheim.at http://www.wertheim.at

[ Delivery address ]	[ Information ]
Order no. (if available)	vault model
name/company	External dimensions (mm) H B T weight (kg)
Street	The load capacity of the transport route and the installation site is sufficient for the weight of the safe
ZIP / City	Sufficient floor space is available
contact person	Photographic material attached, recommended for safes with a weight of 180 kg or more and/or special on-site conditions
phone	Site inspection desired, recommended for safes weighing more than 350 kg and/or special on-site conditions
e-mail	
Desired date (Mon-Fri)	Please note that 100% feasibility cannot be guaranteed based on the completed transport questionnaire and any attached photo material. This can only be guaranteed by a paid advance site visit. Price on request.

Please note that hour windows can only be agreed in the course of the delivery notification for a subsequent surcharge!

## Type of steps:

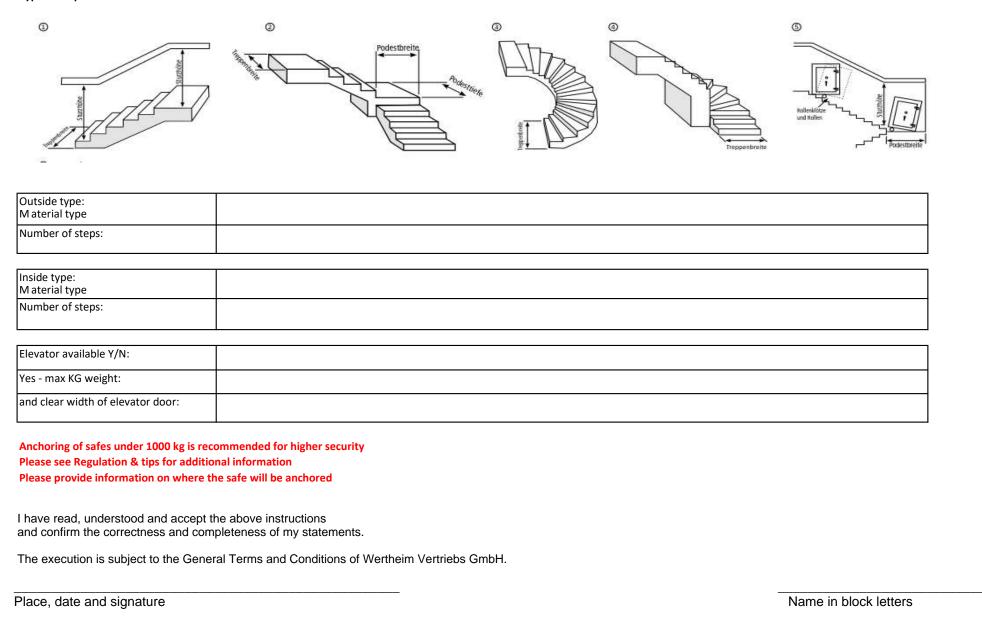



Edition 2022, version 1.0

Wertheim

[ Anchoring ]	[ Delivery ]
Safes weighing less than 1,000 kg must be anchored to a fixed part of the building in accordance with EN 1143-1. Wertheim equips all tested safes with floor anchoring. Strongrooms of resistance grades I to III (except CWS, CWP) also have the anchoring alternative through the rear wall. If further holes are required in addition to the prepared base/rear wall holes, these can be taken into account after the position (side wall, rear wall, ceiling, base) has been specified. Safes weighing less than 1,000 kg are supplied with 1 pc. Anchoring material is supplied. If additional anchors are required, this must be specified when ordering. To ensure proper anchoring, there must be no cables (pipes, wiring, etc.) in the anchoring area. When anchoring to the floor, make sure that it is preferably mounted on a load-bearing concrete base - anchoring only in the screed is not sufficient. When anchoring in the wall, the safe must be flush with the wall. Skirting boards, box walls (for installation in furniture), etc. must be removed in the area of the safe in advance by the customer. The client assumes responsibility for this and must confirm this upon delivery by signing the disclaimer. A declaration of conformity regarding proper anchoring (enclosed with the delivery documents) will be completed by the shipping team or sent with the invoice and must be submitted to the insurer for the full amount of cover. Please note that wall mounting (self-supporting) is not provided as standard. If manufacturer-compliant anchoring cannot be carried out due to structural conditions, the insurer may reduce the security class rating. We recommend that you clarify this with your insurance company in advance.	The delivery and installation of your safe is included as follows Freight paid insurance, installation at destination incl. installation (2-man installatio crew), easily accessible, incl. 1 hour working time Additional working time, wasted/additional journeys or storage costs incurred will be charged according to actual additional expenditure Fixed deadlines (hourly windows) can only be agreed in the course of the deliver notification for an additional charge The client shall be responsible for ensuring the required structural stability and the load bearing capacity of the floor structure in the area of the transportation route an installation site. For safes weighing less than 1,000 kg, including anchoring in accordance with regulations. The delivery dates stated are approximate and in no way binding. Delivery shall be mad by the forwarding agent after prior appointment by telephone (approx. one week befor delivery). Deliveries are made Monday to Friday. Fixed day dates (Mon-Fri) are free charge and can be fixed when ordering Additional services, unsuccessful/cancelled deliveries, canceled appointments, additional journeys and storage costs incurred through the fault of or on the instruction of the customer shall be borne by the customer and will be charged Additional equipment (crane, forklift, etc.) and/or additional personnel for difficu installation situations can be booked. This may require a prior site inspection by the forwarding agent and will be charged separately. The return of old appliances and their professional disposal will be charged at cost if a delivery with smaller vehicles is necessary, this can only be realized with a special trig. The costs incurred for this are surcharges and must be requested separately.
Anchoring:  none floor rear wall both Special acc. to order	I have read, understood and accept the above information and confirm that my details are correct and complete.
Wall condition in the anchoring area:  Concrete Brick	Execution is subject to the General Terms of Delivery of Wertheim Vertriebs GmbH.
Safe to be mounted on a pedestal/concrete base Pedestal height (cm) H	

Please send the completed and signed transportation questionnaire to vertrieb@wertheim.at or by telephone +43 (0)2236 320 350 - 0  $\,$ 

Wertheim Vertriebs GmbH - Danfoss-Str. 6 - 2353 Guntramsdorf - Tel +43 (0)2236 320 350 - 0 - www.wertheim.at

Place, date and signature

Name in block letters