

Wall Safes

AMS Series



Wall safe **AMS0400**

Colour: Grey
hinge: right
Wittkopp 2648 key lock

- Proven Wertheim quality
- Resistance grade I
- Light fire protection

Privately insurable
up to EUR 65.000

Commercial insurable
up to EUR 20.000



EN1143-1
Burglary protection



Grade I



Grade I



4102
(light fire protection)



Class EN 1

Product Information

Door Hinge

DIN right - standard
optional: DIN left

Door Opening Angle

95°

Body

Sturdy, hot-dip galvanised sheet steel construction

Door Structure

Three-walled design, solid steel construction, internal transom space with partial drilling protection

Locking

Driven on 3 sides by solid steel deadbolts via a bolt mechanism with a base, protected by an additional emergency locking mechanism, continuous rear hook on the hinge side

Colour

Grey: RAL 7037
optional: paint finish according to RAL

Locks

Key lock VdS class 1,
Wittkopp 2648 (95 mm)
Electronic lock VdS class 2,
Wittkopp Primor 2600
optional: other lock models (main locks or possible additional locks)

Interior

Shelf adjustable
optional: additional shelf optional (only for models with outer depth 380 mm): Inner safe

Accessories

optional: rear wall armour, interior lighting

Note

Models AMS0401, AMS0601, AMS0801, AMS1001 does not offer a vertical folder depth, but it is possible to store a folder parallel to the door




Optional accessories: rear wall armour

The optional rear wall armouring allows a wall thickness equal to the vault depth. This means that the depth can be less than the required concrete thickness without losing the security class.

Model Overview

AMS Series

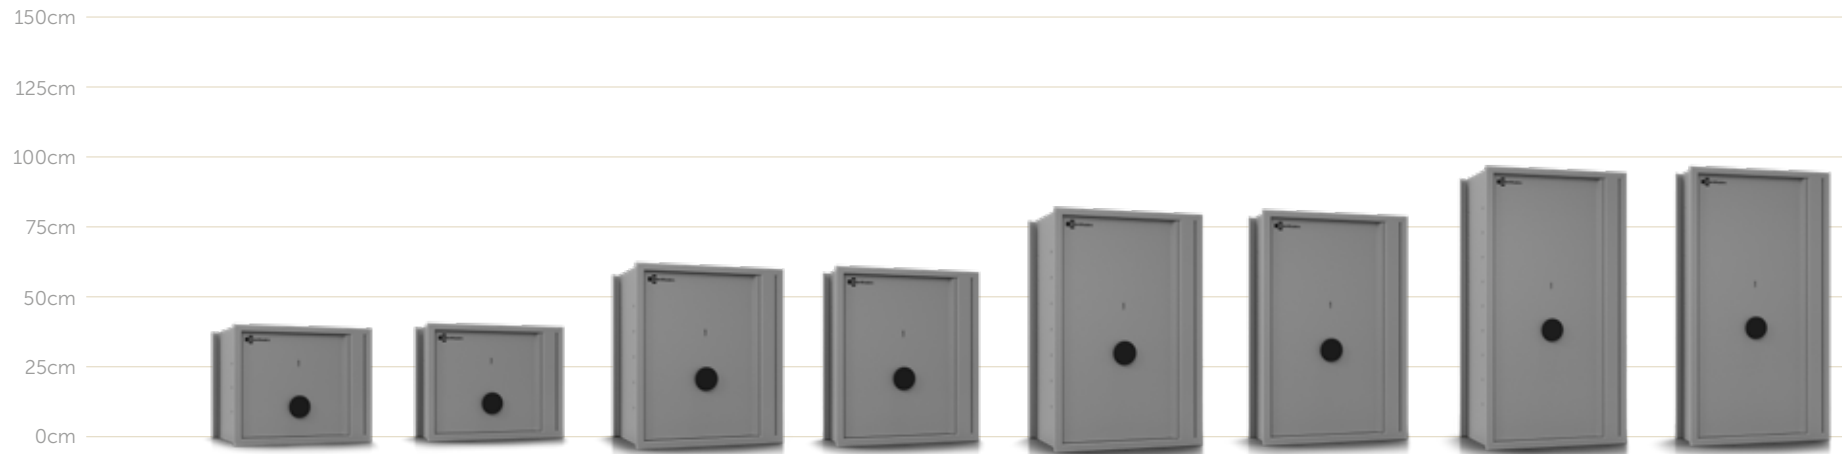

Model	AMS0400	AMS0401	AMS0600	AMS0601	AMS0800	AMS0801	AMS1000	AMS1001
Ext. dimensions h×w×d (mm) incl. hinges	410×510×380	410×510×230	590×510×380	590×510×230	770×510×380	770×510×230	950×510×380	950×510×230
Int. dimensions h×w×d (mm)	360×460×295	360×460×145	540×460×295	540×460×145	720×460×295	720×460×145	900×460×295	900×460×145
Shelves Standard	1	1	1	1	1	1	2	2
Volume (l)	49	24	73	36	98	48	122	60
Weight* (appr. kg)	50	45	65	60	80	70	95	85

In addition to the external depth of the safe shown, an extra 10 mm for fittings and 15 mm for the Wittkopp Primor electric lock must be taken into account.
*The weight specifications correspond to the net weight (without packaging) including lock and the specified shelves.