

# AWS Series



Safe **AWS1500**

Colour: Grey  
hinge: right  
Wittkopp 2648 key lock

- Proven Wertheim quality
- Resistance grade I
- Light fire protection

**Privately insurable**  
up to EUR 65.000

**Commercial insurable**  
up to EUR 20.000



EN1143-1  
Burglary protection



Grade I



Grade I



DIN 4102  
(light fire protection)



Class EN 1

## Product Information

### Door Hinge

DIN right - standard  
optional: DIN left

### Door Opening Angle

180°

### Body

Double-walled design, filled with highly resistant filler material

### Door Structure

Three-walled design, with highly resistant filler material, internal transom space with partially attached drill protection

### Locking

Driven on three sides by solid steel bolts via a boltwork with a base plate, protected by an additional emergency locking mechanism, continuous profile on the hinge side

### Anchoring

Prepared for floor and rear wall bolting, Anchoring material included in the scope of delivery  
Optional: additional holes (position according to customer requirements)

### Cable Drilling

Door hinge side, top rear panel  
optional: additional drill holes (Position according to customer requirements)

### IAS Connection

VdS-certified pre-fitting for installation and connection to an intruder alarm system (IAS)

### Colour

Grey: RAL 7037  
optional: paint finish according to RAL

### Locks

Key lock VdS class 1, Wittkopp 2648, 2 keys (95 mm) Electronic lock VdS class 2, Wittkopp Primor 2600  
optional: other lock models (main locks or possible additional locks)

### Interior

Shelf adjustable optional: additional shelf, interior safe


### Accessories

Optional: VdS-approved steel plinth, fire protection door rebate seal, IAS switch set, interior lighting



## Model Overview

### AWS Series

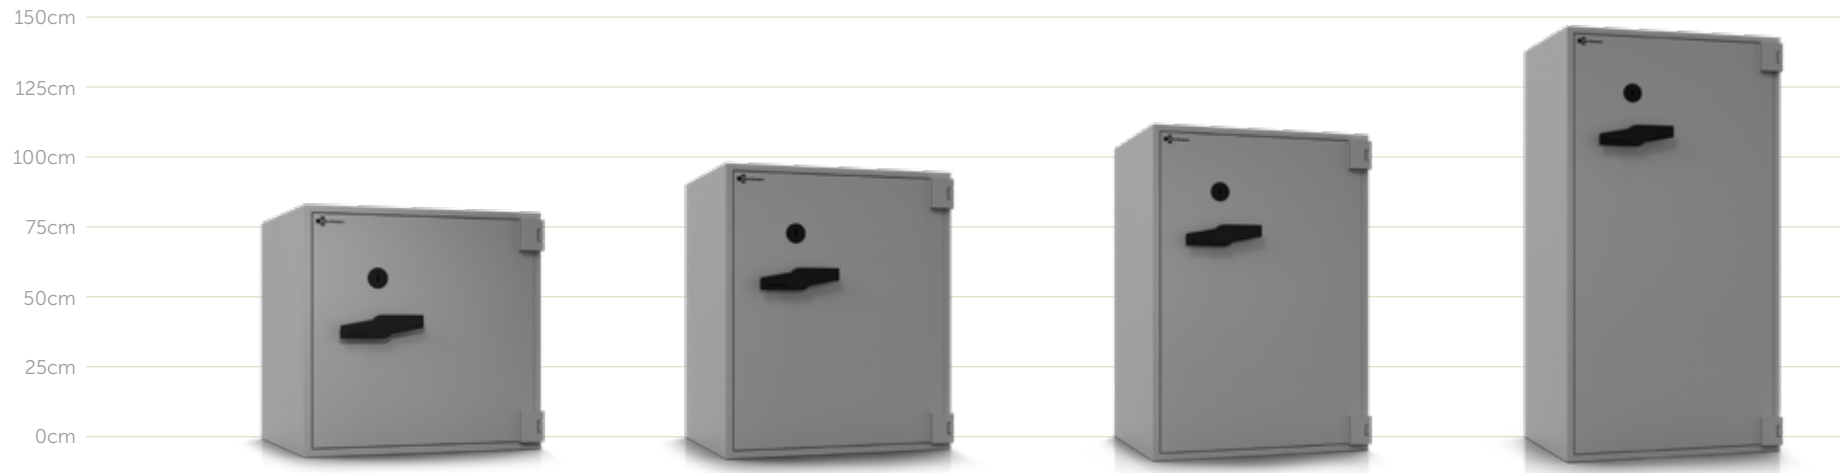

Model	AWS0800	AWS1000	AWS1200	AWS1500
<b>Ext. dimensions</b> h×w×d (mm) incl. hinges	770×790×650	950×790×650	1130×790×650	1490×790×650
<b>Int. dimensions</b> h×w×d (mm)	720×740×525	900×740×525	1080×740×525	1440×740×525
<b>Shelves</b> Standard	1	2	2	3
<b>Volume</b> (l)	280	350	420	559
<b>Weight*</b> (appr. kg)	310	360	410	510

In addition to the indicated outer depth of the safe, a further 60 mm must be taken into account for fittings.

\*The weight specifications correspond to the net weight (without packaging) including lock and the specified shelves.