


BP Series

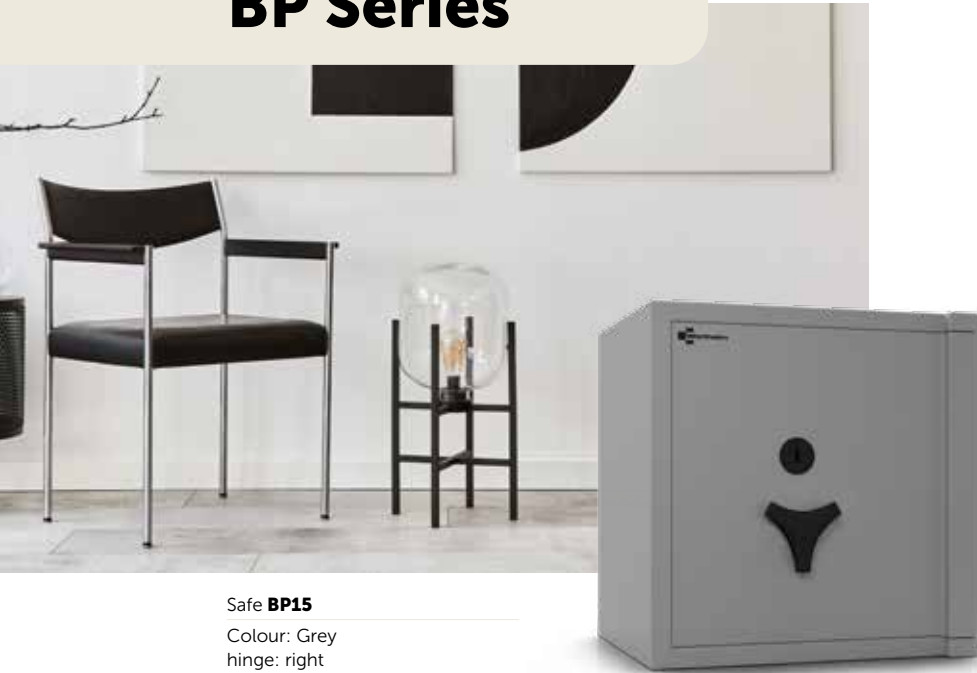

Safe BP15

Colour: Grey
hinge: right
Wittkopp 2648 key lock

- Proven Wertheim quality
- Resistance grade II
- Certified fire protection

Privately insurable
up to EUR 100.000

Commercial insurable
up to EUR 50.000



EN1143-1
Burglary protection



Grade II



Grade II + LFS30
(BP10/41 - LFS60)



EN15659
Fire protection



Class EN 2

Product Information

Door Hinge

DIN right - standard
optional: DIN left

Door Opening Angle

180°

Body

Double-walled design, filled with reinforced, highly resistant filler and heat-absorbing materials

Door Structure

Designed with double rebate and three walls, filled with reinforced, highly resistant filler and heatabsorbing materials, inside transom space with partially attached drill protection, door rebate with several fire and smoke protection seals

Locking

Driven on three sides by solid steel bolts via a boltwork with a base plate, protected by an additional emergency locking mechanism, continuous profile on the hinge side

Anchoring

Prepared for floor and rear wall bolting connection, anchoring material included in the scope of delivery contain

Cable Drilling

Door hinge side, rear panel bottom

IAS Connection

VdS-certified pre-fitting for installation and connection to an intruder alarm system (IAS)

Colour

Grey: RAL 7037
optional: paint finish according to RAL

Locks

Key lock VdS class 1, Wittkopp 2648, 2 keys (145 mm) Electronic lock VdS class 2, Wittkopp Primor 2600
optional: other lock models (main locks or possible additional locks)

Interior

Adjustable shelf optional: additional shelf, interior safe, drawer, pull-out shelf

Accessories

Optional: IAS switch set, interior lighting



Model Overview

BP Series



Model	BP10**	BP15	BP20	BP25	BP30	BP35	BP40	BP41**
Ext. dimensions h×w×d (mm) incl. hinges and handle	474×605×522	629×605×522	799×605×522	969×605×522	1139×605×522	1309×605×522	1479×605×522	1479×765×582
Int. dimensions h×w×d (mm)	360×495×310	515×495×310	685×495×310	855×495×310	1025×495×310	1195×495×310	1365×495×310	1365×655×370
Shelves Standard	1	1	1	2	2	3	3	3
Volume (l)	55	79	105	131	157	183	209	331
Weight* (appr. kg)	190	235	280	325	375	420	465	580

In addition to the indicated outer depth of the safe, a further 6 mm must be taken into account for the Primor electric lock variant.

*The weight specifications correspond to the net weight (without packaging) including lock and the specified shelves.

**BP10/BP41 - Fire protection LFS60