

BWS Series



Safe **BWS1000**

Colour: Grey
hinge: right
Wittkopp 2648 key lock

- Proven Wertheim quality
- Resistance grade II
- Light fire protection

Privately insurable
up to EUR 100.000

Commercial insurable
up to EUR 50.000



EN1143-1
Burglary protection



Grade II



Grade II



DIN 4102
(light fire protection)



Class EN 2

Product Information

Door Hinge

DIN right - standard optional:
DIN left

Door Opening Angle

180°

Body

Double-walled design, filled with reinforced, highly resistant filler material

Door Structure

Three-walled design, filled with reinforced, highly resistant filler material, internal transom space with partially attached drill protection

Locking

Driven on three sides by solid steel bolts via a boltwork with a base plate, protected by an additional emergency locking mechanism, a continuous profile on the hinge side that engages behind it

Anchoring

Prepared for floor and rear wall bolting, anchoring material included in the scope of delivery
Optional: additional drill holes (position according to customer requirements)

Cable Drilling

Door hinge side, rear panel
optional: additional drill holes (position according to customer requirements)

IAS Connection

VdS-certified pre-fitting for installation and connection to an intruder alarm system (IAS)

Colour

Grey: RAL 7037
optional: paint finish according to RAL

Locks

Key lock VdS class 1, Wittkopp 2648, 2 keys (95 mm) Electronic lock VdS class 2, Wittkopp Primor 2600
optional: other lock models (main locks or possible additional locks)

Interior

Adjustable optional: additional shelf, interior safe


Accessories

Optional: VdS-approved steel plinth, fire protection door rebate seal, IAS switch set, interior lighting



Model Overview

BWS Series

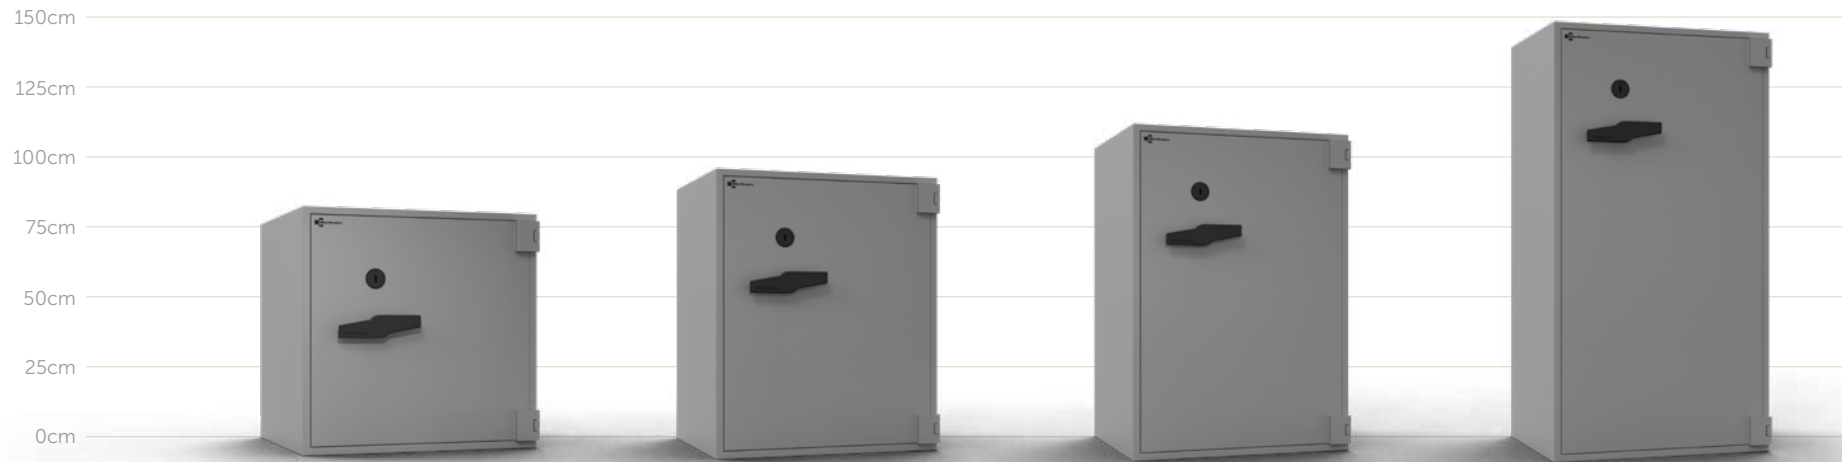

| Model | BWS0800 | BWS1000 | BWS1200 | BWS1500 |
|------------------------------------------------------|-------------|-------------|--------------|--------------|
| Ext. dimensions h×w×d (mm) incl. hinges | 770×790×650 | 950×790×650 | 1130×790×650 | 1490×790×650 |
| Int. dimensions h×w×d (mm) | 720×740×525 | 900×740×525 | 1080×740×525 | 1440×740×525 |
| Shelves Standard | 1 | 2 | 2 | 3 |
| Volume (l) | 280 | 350 | 420 | 559 |
| Weight* (appr. kg) | 340 | 395 | 450 | 560 |

In addition to the indicated outer depth of the safe, a further 60 mm must be taken into account for fittings.
*The weight specifications correspond to the net weight (without packaging) including lock and the specified shelves.