

BWS Series



Safe **BWS1000**
 Colour: Grey
 Hinge: right
 Wittkopp 2648 key lock

- Proven Wertheim quality
- Resistance grade II
- Light fire protection

Privately insurable
 up to EUR 100.000

Commercial insurable
 up to EUR 50.000



EN1143-1
 Burglary protection



Grade II



Grade II



DIN 4102
 (light fire protection)



Class EN 2

Product Information

Door Hinge

DIN right - standard
 optional: DIN left

Door Opening Angle

180°

Body

Double-walled, filled with armored
 highly resistant filler material

Door Structure

Triple-walled, filled with armored
 highly resistant filler material, internal
 boltwork with partial drill protection

Locking

Three-way moving boltwork with
 large steel bolts, protected by
 an additional emergency locking
 mechanism, continuous profile on the
 hinge side

Anchoring

Prepared for floor and rear wall
 bolting, anchoring material included in
 the scope of delivery
 optional: additional holes
 (position according to customer
 requirements)

Cable Hole

Door hinge side, rear wall top
 optional: additional holes
 (position according to customer
 requirements)

IAS Connection

VdS-certified pre-fitting for installation
 and connection to an intruder alarm
 system (IAS)

Colour

Grey: RAL 7037
 optional: paint finish according to RAL

Locks

Key lock VdS class 1,
 Wittkopp 2648, 2 keys (95 mm)
 Electronic lock VdS class 2,
 Wittkopp Primor 2600
 optional: other lock models (main
 locks or possible additional locks)

Interior

Adjustable shelf
 optional: additional shelf, inside locker


Accessories

Optional: VdS-approved steel plinth,
 fire protection door rebate seal,
 IAS switch set, interior lighting



Model Overview

BWS Series

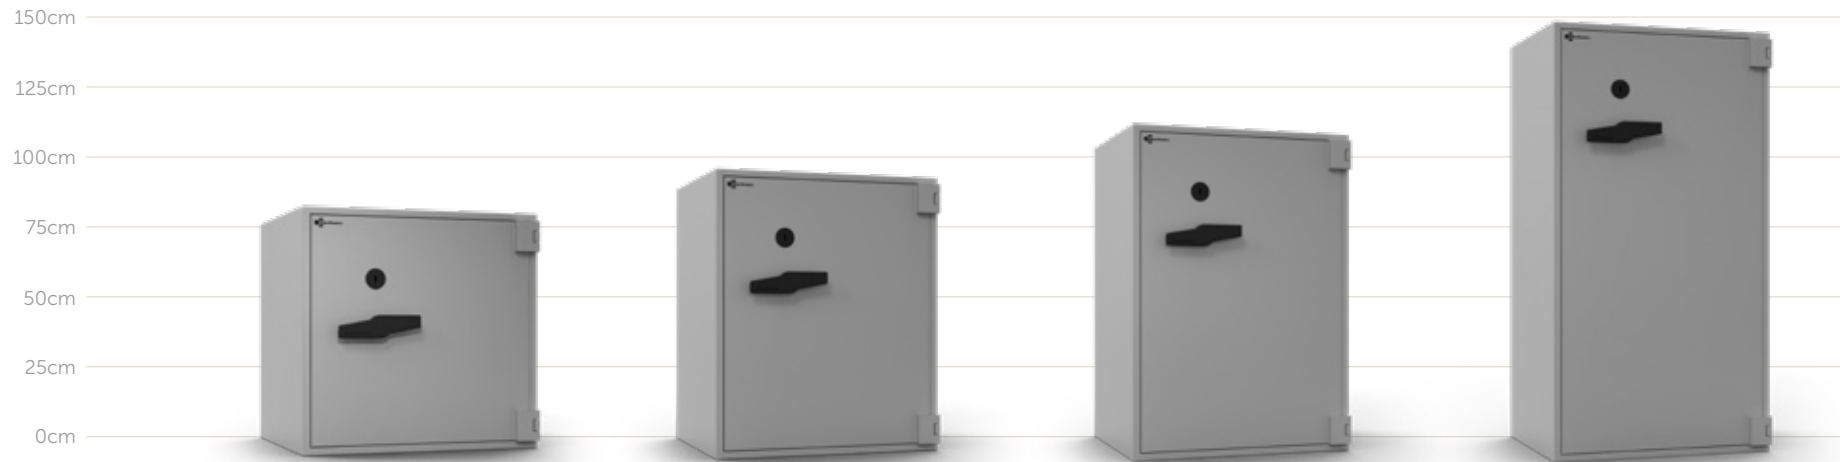

Model	BWS0800	BWS1000	BWS1200	BWS1500
Ext. dimensions h×w×d (mm) incl. hinges	770×790×650	950×790×650	1130×790×650	1490×790×650
Int. dimensions h×w×d (mm)	720×740×525	900×740×525	1080×740×525	1440×740×525
Shelves Standard	1	2	2	3
Volume (l)	280	350	420	559
Weight* (appr. kg)	340	395	450	560

In addition to the indicated outer depth of the safe, a further 60 mm must be taken into account for fittings.
*The weight specifications correspond to the net weight (without packaging) including lock and the specified shelves.