

# DWSKB Series



Safe **DWS1200KB**

Colour: Grey  
Hinge: right  
2 x S&G key lock

- Proven Wertheim quality
- Resistance grade IVKB
- Certified fire protection\*
- Core drill protection

**Privately insurable**  
by arrangement

**Commercial insurable**  
up to EUR 250.000



EN1143-1  
Burglary protection



Grade IVKB



Grade IVKB + LFS30\*  
LFS60\* (optional)



EN15659  
Fire protection\*



Class EN 5

\*except models 0849KB, 1902KB and 1904KB  
KB = core drill protection

## Product Information

### Door Hinge

DIN right - standard  
optional: DIN left  
models 1902KB | 1904KB double-doored

### Door Opening Angle

180°

### Body

Double-walled, reinforced, with core drill protection, filled with armored highly resistant filler material

### Door Structure

Triple-walled, reinforced, with core drill protection, filled with armored highly resistant filler material, internal boltwork with partial drill protection, door rebate with several fire and smoke protection seals

### Locking

Driven on three sides by solid steel bolts via a boltwork with a base plate, protected by a glass plate with additional emergency locking mechanism, steel bolts welded on the hinge side to grip behind

### Anchoring

Prepared for floor bolting, anchoring material included with models 0849KB and 0850KB, optional: additional holes\*\* (position according to customer requirements)

### Cable Hole

Door hinge side, ceiling and side wall  
optional: additional holes\*\* (position according to customer requirements)

### IAS Connection

VdS-certified pre-fitting for installation and connection to an intruder alarm system (IAS)

### Colour

Grey: RAL 7037  
optional: paint finish according to RAL

### Locks

Safes from grade IV must be equipped with at least 2 locks, lock combinations (locks from VdS class 2) freely selectable

### Interior

Adjustable shelf  
optional: additional shelf, inside locker, optional (0850KB-1901KB):  
drawer, pull-out shelf

### Accessories


Optional: IAS switch set, interior lighting, certified fire protection LFS60\*, demountable version from model 1000KB – assembly on site



\*\*In case of additional holes LFS fire protection is invalid

## Model Overview

### DWSKB Series

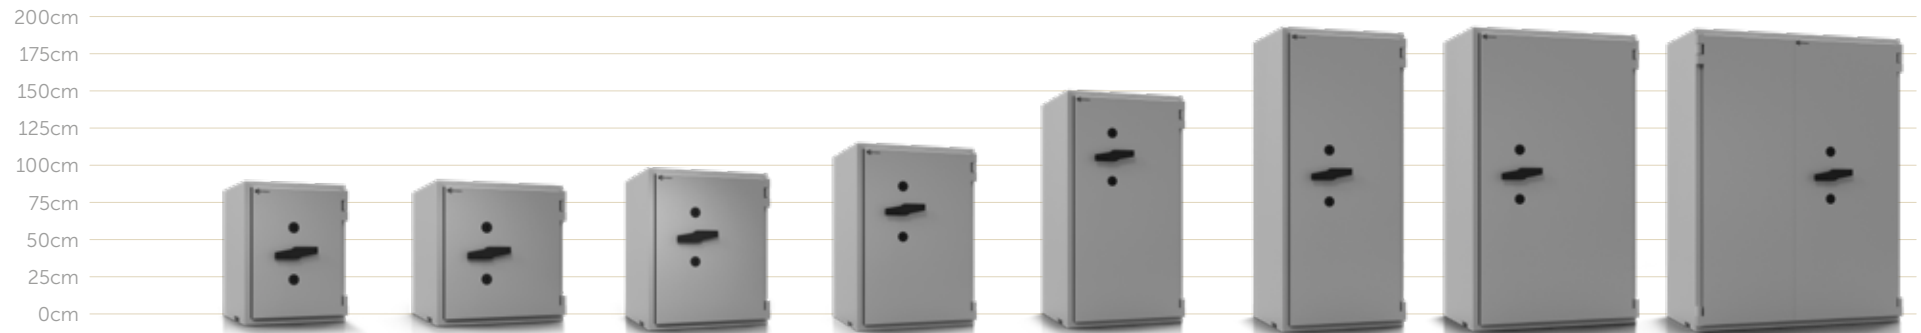

Model	DWS0849KB	DWS0850KB	DWS1000KB	DWS1200KB	DWS1600KB	DWS1901KB	DWS1903KB/1902KB**	DWS1904KB**
<b>Ext. dimensions</b> h×w×d (mm) incl. hinges	848×645×565	848×810×725	1003×810×725	1193×810×725	1538×810×725	1883×810×725	1883×1110×725	1883×1415×725
<b>Int. dimensions</b> h×w×d (mm)	695×495×320	695×660×480	850×660×480	1040×660×480	1385×660×480	1730×660×480	1730×960×480	1730×1265×480
<b>Shelves</b> Standard	1	1	2	2	3	4	4	4
<b>Volume</b> (l)	110	220	269	329	439	548	797	1050
<b>Weight*</b> (appr. kg)	635	875	1030	1150	1405	1680	2090/2130	2550

In addition to the indicated outer depth of the safe, a further 60 mm must be taken into account for fittings.  
 \*The weight specifications correspond to the net weight (without packaging) including lock and the specified shelves.  
 \*\*Models 1902KB and 1904KB in double-doored design