

EWS Series



Safe **EWS1000**
 Colour: Grey
 Hinge: right
 2 x key lock S&G

- Proven Wertheim quality
- Resistance grade V
- Certified fire protection*

Privately insurable
 by arrangement

Commercial insurable
 up to EUR 250.000



EN1143-1
 Burglary protection



Grade V



Grade V + LFS30*
 LFS60* (optional)



EN15659
 Fire protection*



Class EN 5

*except models 0849, 1902 and 1904

Product Information

Door Hinge

DIN right - standard
 optional: DIN left
 models 1902 | 1904 double-doored

Door Opening Angle

180°

Body

Double-walled, reinforced, filled with armored highly resistant filler material

Door Structure

Triple-walled, reinforced, filled with armored highly resistant filler material, internal boltwork with partial drill protection, door rebate with several fire and smoke protection seals

Locking

Driven on three sides by solid steel bolts via a boltwork with a base plate, protected by a glass plate with additional emergency locking mechanism, steel bolts welded on the hinge side to grip behind

Anchoring

Prepared for floor bolting, anchoring material included with models 0849 and 0850, optional: additional holes** (position according to customer requirements)

Cable Hole

Door hinge side, ceiling and side wall
 optional: additional holes** (position according to customer requirements)

IAS Connection

VdS-certified pre-fitting for installation and connection to an intruder alarm system (IAS)

Colour

Grey: RAL 7037
 optional: paint finish according to RAL

Locks

Safes from grade IV must be equipped with at least 2 locks, lock combinations (locks from VdS class 2) freely selectable

Interior

Adjustable shelf
 optional: additional shelf, inside locker, optional (0850-1901): drawer, pull-out shelf

Accessories


Optional: IAS switch set, interior lighting, certified fire protection LFS60*, demountable version from model 1000 – assembly on site



**In case of additional holes LFS fire protection is invalid

Model Overview

EWS Series

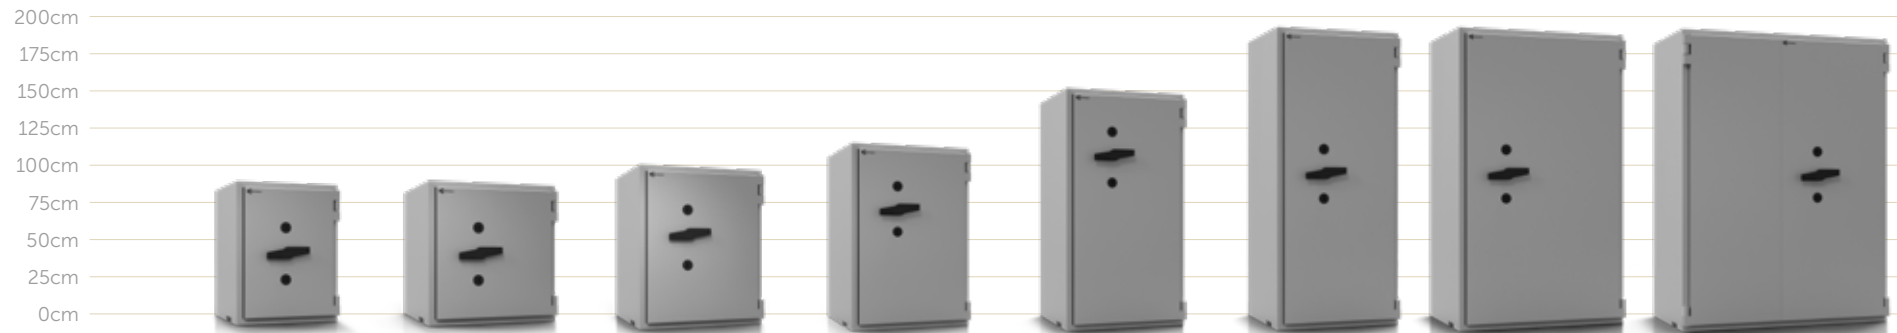

Model	EWS0849	EWS0850	EWS1000	EWS1200	EWS1600	EWS1901	EWS1903/1902**	EWS1904**
Ext. dimensions h×w×d (mm) incl. hinges	848×645×565	848×810×725	1003×810×725	1193×810×725	1538×810×725	1883×810×725	1883×1110×725	1883×1415×725
Int. dimensions h×w×d (mm)	695×495×320	695×660×480	850×660×480	1040×660×480	1385×660×480	1730×660×480	1730×960×480	1730×1265×480
Shelves Standard	1	1	2	2	3	4	4	4
Volume (l)	110	220	269	329	439	548	797	1050
Weight* (appr. kg)	665	935	1060	1220	1505	1790	2230/2270	2720

In addition to the indicated outer depth of the safe, a further 60 mm must be taken into account for fittings.

*The weight specifications correspond to the net weight (without packaging) including lock and the specified shelves.

**Models 1902 and 1904 in double-doored design