

# EWS Series



Safe **EWS1000**  
 Colour: Grey  
 hinge: right  
 2 x key lock S&G

- Proven Wertheim quality
- Resistance grade V
- Certified fire protection\*

**Privately insurable**  
 by arrangement

**Commercial insurable**  
 up to EUR 250.000



EN1143-1  
 Burglary protection



Grade V



Grade V + LFS30+  
 LFS60\* (optional)



EN15659  
 Fire protection\*



Class EN 5

\*except models 0849, 1902 und 1904

## Product Information

### Door Hinge

DIN right - standard  
 optional: DIN left  
 Models 1902 and 1904 double-leaf

### Door Opening Angle

180°

### Body

Double-walled, reinforced design,  
 filled with reinforced, highly resistant  
 filler material

### Door Structure

Triple-walled, reinforced design, filled  
 with reinforced, highly resistant filler  
 material, internal transom space with  
 partially attached drill protection,  
 door rebate fitted with several fire and  
 smoke protection seals

### Locking

Driven on 3 sides by solid steel bolts  
 via a boltwork with a base, protected  
 by a glass plate with additional  
 emergency bolts, steel bolts welded on  
 the hinge side to grip behind

### Anchoring

Prepared for floor bolting, anchoring  
 material included with models 0849  
 and 0850

### Cable Drilling

Door hinge side, ceiling and side panel

### IAS Connection

VdS-certified pre-fitting for installation  
 and connection to an intruder alarm  
 system (IAS)

### Colour

Grey: RAL 7037  
 optional: paint finish according to RAL

### Locks

Safes from grade IV must be fitted with  
 at least 2 locks Lock combinations  
 (locks from VdS class 2) freely  
 selectable

### Interior

Adjustable shelf  
 optional: additional shelf, inner safe  
 optional models 0850-1901:  
 drawer, pull-out shelf


### Accessories

Optional: IAS switch set, interior  
 lighting, certified fire protection  
 LFS60\* demountable version from  
 model 1000 - assembly on site



## Model Overview

### EWS Series

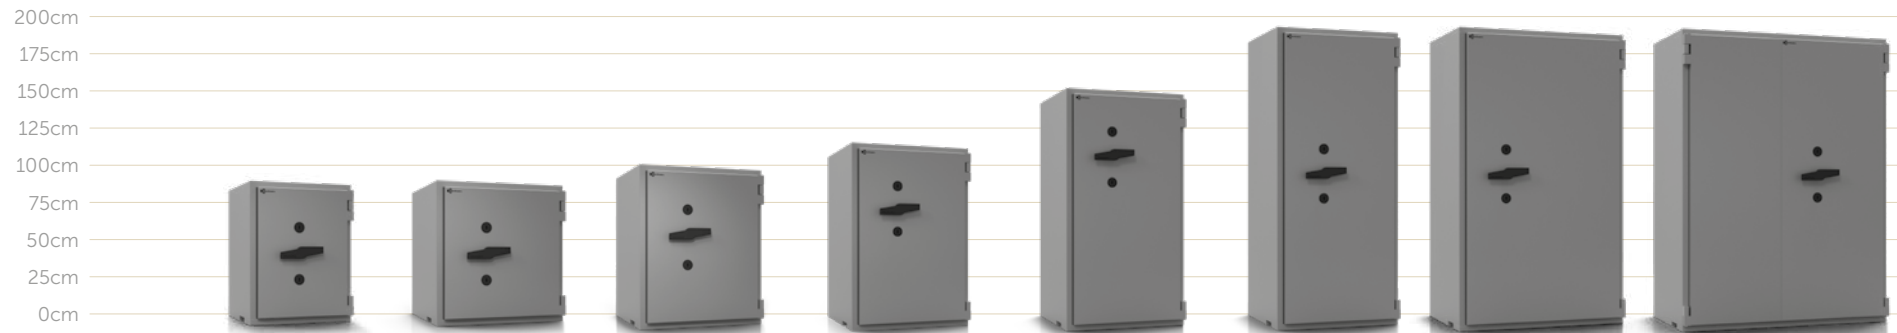

Model	EWS0849	EWS0850	EWS1000	EWS1200	EWS1600	EWS1901	EWS1903/1902**	EWS1904**
<b>Ext. dimensions</b> h×w×d (mm) incl. hinges	848×645×565	848×810×725	1003×810×725	1193×810×725	1538×810×725	1883×810×725	1883×1110×725	1883×1415×725
<b>Int. dimensions</b> h×w×d (mm)	695×495×320	695×660×480	850×660×480	1040×660×480	1385×660×480	1730×660×480	1730×960×480	1730×1265×480
<b>Shelves</b> Standard	1	1	2	2	3	4	4	4
<b>Volume</b> (l)	110	220	269	329	439	548	797	1050
<b>Weight*</b> (appr. kg)	665	935	1060	1220	1505	1790	2230/2270	2720

In addition to the indicated outer depth of the safe, a further 60 mm must be taken into account for fittings.

\*The weight specifications correspond to the net weight (without packaging) including lock and the specified shelves.

\*\*Models 1902 and 1904 in double-leaf design