

# EWSKB-Serie



Safe **EWS1600KB**

Colour: Grey  
hinge: right  
2 x key lock S&G

- Proven Wertheim quality
- Resistance grade VKB
- Certified fire protection\*
- Core drill protection

**Privately insurable**  
by arrangement

**Commercial insurable**  
up to EUR 375.000



EN1143-1  
Burglary protection



Grade VKB



Grade VKB + LFS30\*  
LFS60\* (optional)



EN15659  
Fire protection\*



Class EN 6

\*except models 0849KB, 1902KB and 1904KB  
KB = crown drill protection

## Product Information

### Door Hinge

DIN right – standard  
optional: DIN left  
Models 1902 and 1904 double-leaf

### Door Opening Angle

180°

### Body

Double-walled, reinforced design,  
with crown drilling protection, filled  
with reinforced, highly resistant filler  
material

### Door Structure

Triple-walled, reinforced design, with  
crown drill protection, filled with  
reinforced, highly resistant filler  
material, internal transom space with  
partially attached drill protection, door  
rebate fitted with several fire and  
smoke protection seals

### Locking

Driven on 3 sides by solid steel bolts via  
a boltwork with a base plate, protected  
by a glass plate with additional  
emergency bolts, steel bolts welded on  
the hinge side to grip behind

### Anchoring

Prepared for floor bolting, anchoring  
material included with models 0849KB  
and 0850KB

### Cable Drilling

Door hinge side, ceiling and side panel

### IAS Connection

VdS-certified pre-fitting for installation  
and connection to an intruder alarm  
system (IAS)

### Colour

Grey: RAL 7037  
optional: paint finish according to RAL

### Locks

Safes from grade IV must be equipped  
with at least 2 locks Lock combinations  
(locks from VdS class 2) freely  
selectable

### Interior

Adjustable shelf  
optional: additional shelf, inner safe  
optional models 0850KB-1901KB:  
drawer, pull-out shelf


### Accessories

Optional: IAS switch set, interior  
lighting, certified fire protection LFS60\*  
dismountable version from model 1000  
- assembly on site



## Model Overview

### EWSKB Series

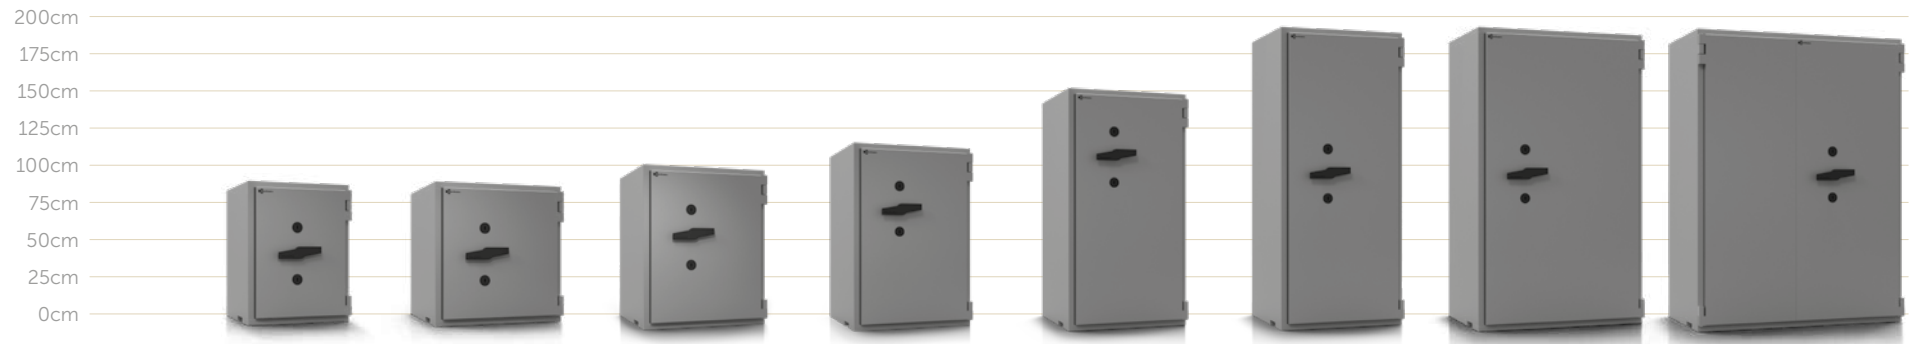

Model	EWS0849KB	EWS0850KB	EWS1000KB	EWS1200KB	EWS1600KB	EWS1901KB	EWS1903KB/1902KB**	EWS1904KB**
<b>Ext. dimensions</b> h×w×d (mm) incl. hinges	848×645×565	848×810×725	1003×810×725	1193×810×725	1538×810×725	1883×810×725	1883×1110×725	1883×1415×725
<b>Int. dimensions</b> h×w×d (mm)	695×495×320	695×660×480	850×660×480	1040×660×480	1385×660×480	1730×660×480	1730×960×480	1730×1265×480
<b>Shelves</b> Standard	1	1	2	2	3	4	4	4
<b>Volume</b> (l)	110	220	269	329	439	548	797	1050
<b>Weight*</b> (appr. kg)	665	935	1060	1220	1505	1790	2230/2270	2720

In addition to the indicated outer depth of the safe, a further 60 mm must be taken into account for fittings.

\*The weight specifications correspond to the net weight (without packaging) including lock and the specified shelves.

\*\*Models 1902KB and 1904KB in double-leaf design