

Practical Interior

Wertheim offers a wide range of furnishing options. The standard equipment includes adjustable shelves (number depends on model height). Further equipment is optionally available.

Please note that the installation options listed depend on the model. Please refer to the respective model page for possible applications.



Shelf

The shelf with a load capacity of 20 kg can be variably adjusted in the respective height division and thus enables customised furnishing design. Shelves for higher loads on request. Height division:

AL, AN, AP, BG, BM, BP, CM, CP:	85 mm
AWS, BWS:	60 mm (Models 1500: 90 mm)
AMS:	80 mm
DWS(KB)-EWS(KB) 0849:	60 mm
DWS(KB)-EWS(KB) ab 0850, BWP:	69 mm



Inner Safe ¹

The inner safe with a load capacity of approx. 50 kg can be locked with a key lock and is available in different heights, with one or two leaves, depending on the model.

	External height	Clear internal height
AL, AN, AP, BG, BM, BP, CM, CP:	1-leaf, 170 or 340 mm	137 or 307 mm
AWS, BWS:	2-leaf, 180 or 360 mm	143 or 323 mm
AMS:	1-leaf, 180 mm	145 mm
DWS(KB)-EWS(KB) 0849:	1-leaf, 180 or 360 mm	143 or 323 mm
DWS(KB)-EWS(KB) from 0850, BWP:	2-leaf, 240 or 360 mm high	203 or 323 mm



Drawer ²

The drawer with a load capacity of 45 kg is available in different heights depending on the model.

AL, AN, AP, BG, BM, BP, CM, CP:	80 or 165 mm Clear internal height
DWS(KB)-EWS(KB) 0850 - 1901:	85 or 175 mm Clear internal height



Lockable Drawer ²

The drawer with a load capacity of 45 kg can be locked with a key lock and is available in different heights depending on the model.

AL, AN, AP, BG, BM, BP, CM, CP:	65 or 150 mm Clear internal height
DWS(KB)-EWS(KB) 0850 - 1901:	70 od. 160 mm Clear internal height
CWP:	134 mm Clear internal height



Pull-Out Shelf ²

The pull-out shelf has a load capacity of 45 kg. Height division:

AL, AN, AP, BG, BM, BP, CM, CP:	85 mm
DWS(KB)-EWS(KB) 0850 - 1901:	90 mm
CWP:	min. 155 mm (120 kg load capacity)




Fig. wooden fittings ALZ007200

Safe with wooden fittings for AL15 and BG15

We are also happy to manufacture wooden fittings in our own Wertheim joinery according to your wishes - to match your selected safe. Please contact our team of advisors for more information.

Required wall clearances for drawer / pull-out shelf

AL, BG	D = 300 mm
AN, BM	D = 375 mm
AP, BP, CP	D = 325 mm
BP41	D = 475 mm
CM 15-25	D = 360 mm
CM 30-40	D = 475 mm
AWS, BWS	D = 570 mm
D-EWS(KB) 0850-1901	D = 530 mm

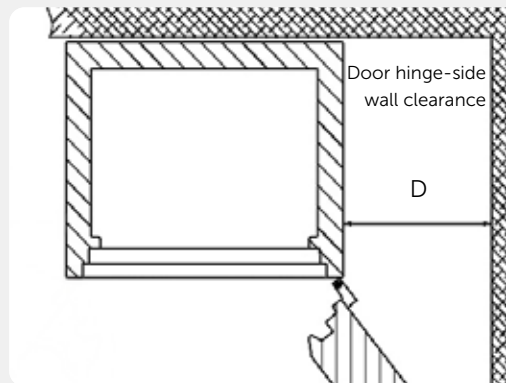

1 Please note that internal safes do not offer any folder depth - with the exception of types AWS, BWS, BWP and DWS(KB)-EWS(KB) from 0850.

2 The required wall clearance on the hinge side must be observed at the installation site. If the drawer/pull-out shelf is installed in the top position, no IAS (Intruder alarm system) connection/switch set is possible for safes in grade I, II and type CP.

Drawer/pull-out shelves for higher loads for types DWS(KB), EWS(KB), BWP on request. Fitting variants for type CWP on request. For lockable drawers, the drawer key must be removed before locking the safe, otherwise the safe door cannot be closed.